

MONITOR OXYGEN PORTABLE

MANUFACTURER: MINE SAFETY APPL COMP

Manufacturer Model# MINIOX 3000

Manufacturer's PHONE: (724) 773-9271 FAX: (724) 773-8573

Manufacturer's Website: <http://www.msanorthamerica.com>

Item Web Link:

http://www.ohiomedical.com/showProduct.aspx?product_id=534

AAC 'L' ITEM NSN 6515-01-440-9394

UAs: 267C

USAMMA POC: Customer Relationship Management 301-619-1288/4301 - DSN 343-1288/4301

UNIT PRICE: \$411.75

System Description: For continuous oxygen monitoring, the MiniOX 3000 Oxygen Monitor is portable, easy to use, and is designed for in-line oxygen monitoring in hospital, home ventilator, NICU, and anesthesia delivery equipment applications. Powered by one 9-volt battery, the MiniOX 3000 Oxygen Monitor provides up to 1500 hours of use. Each unit is shipped complete with sensor, coiled cable, tee adapter, and battery.

Features:

- High and low oxygen concentration alarms
- Automatic calibration
- Battery life indicators and alarms
- Sensor/cable disconnect alarm
- Alarm verification indicator
- Range: 0 - 100 % O²
- Resolution: 0.1 O²
- Linearity: ± 1 %

- Battery indications:


Stage 1: Warning that approximately six hours of monitoring life remain. "LO BAT" appears on display; beep sounds every 30 seconds until battery is replaced or Stage 2 occurs.

Stage 2: Alarm that proper operation is not assured. Monitor shuts down; audible and visual alarms are activated.


NOTE: The MiniOX (R) Oxygen Monitor line was sold to Ohio Medical on March 30, 2010. They may be contacted by calling toll free, 866-549-6446 or 800-851- 4500. The web site for Ohio Medical is <http://www.ohiomedical.com>.




MONITOR OXYGEN PORTABLE
PART # MINIOX 3000
NSN 6515014409394

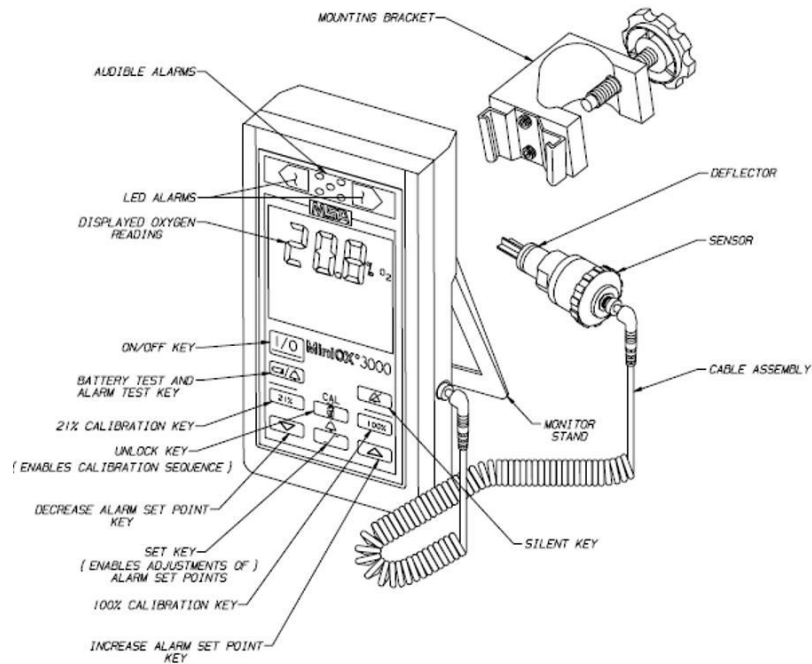

MONITOR FUNCTIONAL AND PARTS DIAGRAM
NSN 6515014409394

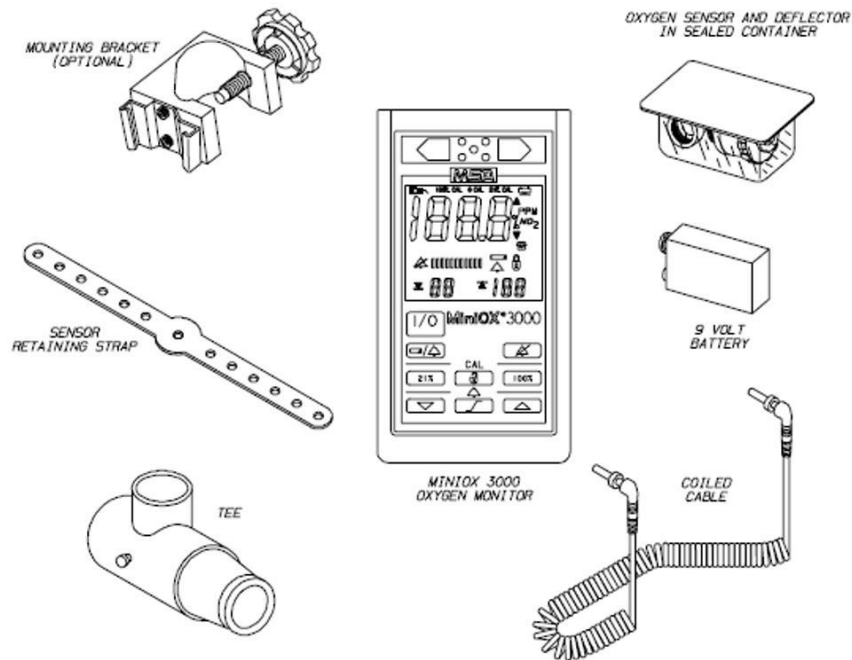

MONITOR ACCESSORIES DIAGRAM
NSN 6515014409394

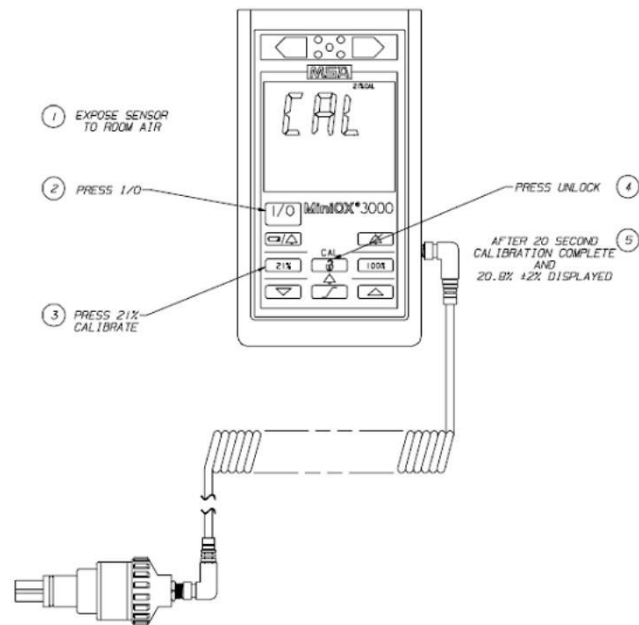

MONITOR DIAGRAM

MONITOR OXYGEN PORTABLE **PHYSICAL & ENVIRONMENTAL SPECIFICATIONS**

Item Dimensions	Height (Inches)	5.98
	Width (Inches)	3.26
	Length (Inches)	1.31
	Cube (Cubic Feet)	0.0148
	Weight	9.2 oz
Ship Dimensions	Height (Inches)	10.25
	Width (Inches)	7.56
	Length (Inches)	6
	Cube (Cubic Feet)	0.2691
	Weight	1.7 lbs
Storage Temp		-40 to 158 °F
Operating Temp		32 to 104 °F
Storage Humidity		5 to 95%
Operating Humidity		5 to 95%
Amps		
Watts		
Power Requirements	9 VDC	
Notes		

**MONITOR OXYGEN PORTABLE
ACCESSORIES & CONSUMABLES - STARTUP**

NSN	Notes	Nomenclature	MFR PN Mine Safety Appl Comp	DIST PN	QTY	UI	Unit Price	Total Price	Shelf Life Mon.
6515014409394		Monitor Oxygen Portable	MINIOX 3000		1	EA	\$411.75	\$411.75	N/A
6135009002139	See Additional Note Below	9 Volt DC Battery			1	EA	Incl w/NSN 9394	Incl w/NSN 9394	N/A
6515013181535		Oxygen Sensor	406931		1	EA	Incl w/NSN 9394	Incl w/NSN 9394	6
6515013205620		Adapter Tee	473021		1	EA	Incl w/NSN 9394	Incl w/NSN 9394	N/A
6515013206493		10 Ft. Cable	472045		1	EA	Incl w/NSN 9394	Incl w/NSN 9394	N/A
NSN Not Required		Literature, Operator	711449		1	EA	Incl w/NSN 9394	Incl w/NSN 9394	N/A
NSN Not Required		Retaining Strap, Oxygen Sensor	634249		1	EA	Incl w/NSN 9394	Incl w/NSN 9394	N/A

**MONITOR OXYGEN PORTABLE
ADDITIONAL NOTE:**

Start-up quantity or unit of issue is different from Resupply quantity/unit of issue.

**MONITOR OXYGEN PORTABLE
WEB LINKS**

[Click Below for Manual Available Online](http://www.ohiomedical.com/literature/814358%20MiniOX%203000%20Operating%20Manual.pdf)

<<http://www.ohiomedical.com/literature/814358%20MiniOX%203000%20Operating%20Manual.pdf>>